NO	DATE	ZONE	REVISION	CO'T	SIGN
⚠					

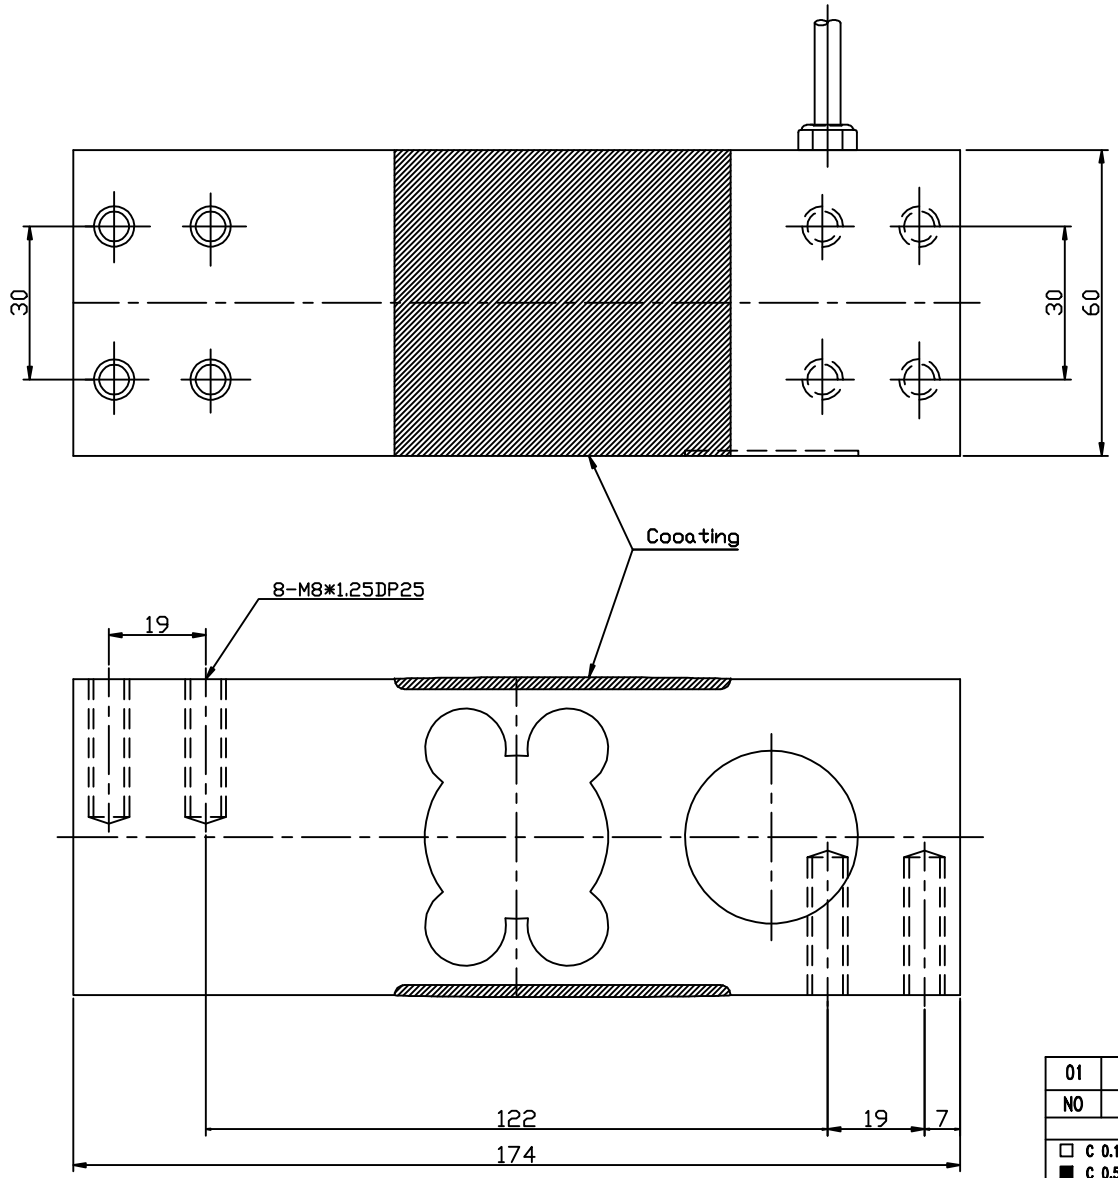

* Specifications

Rated capacity(R.C)	100kgf,250gkf
Rated output(R.O)	2mV/V±1%
Nonlinearity	0.02%RO
Hysteresis	0.02%RO
Repeatability	0.02%RO
Excitation recommended	10V
Terminal resistance	350Ω ±1%
Insulation resistance bridge	2000MΩ
Temperature range, compensated	-10 ~ 50°C
Temperature range, safe	-10 ~ 50°C
Safe overload	120%RC
Cable length	ø5±0.3mm 4Core, 2m

01						
NO	DESCRIPTION	MATERIAL	HEART TREAT	Q'TY	DIMENSIONS	REMARK

CHAMFER: ☐ C 0.1 ☐ C 0.3 ■ C 0.5 ☐ C 1	SCALE 1 : 1	ANGLE 1st ③rd		DESCRIPTION	LOADCELL
TOLERANCE LIMITS: ■ MM ☐ INCH	DRAWN BY	PLANNED BY	CHECKED BY / APPROVED BY	MODEL	ORDER.
0. ±0.1 / 0.0 ±0.04 0.0 ±0.05 / 0.00 ±0.02 0.00 ±0.01 / 0.000 ±0.004 0.000 ±0.002 / 0.0000 ±0.0002	JJS 2013.08.14			CB2C K100,K250	ORDER DWG. NO
	DACELL TEL 043-260-2242 www.dacell.com			DWG NO CB2C-K100,K250	SHEET